



Optimal solutions, faster



Industrial Wireless

Wireless from the sensor to the network




Australia-wide, with offices in Melbourne, Geelong, Gippsland, Albury, Tasmania & Adelaide

Our Industrial Wireless products for your automation infrastructure

Phoenix Contact is a leading international supplier for automation infrastructure. Industrial Wireless products from Phoenix Contact provide reliability and security for the transmission of data and signals.

Wireless systems enable you to easily and efficiently negotiate the many challenges faced in an industrial communication infrastructure.

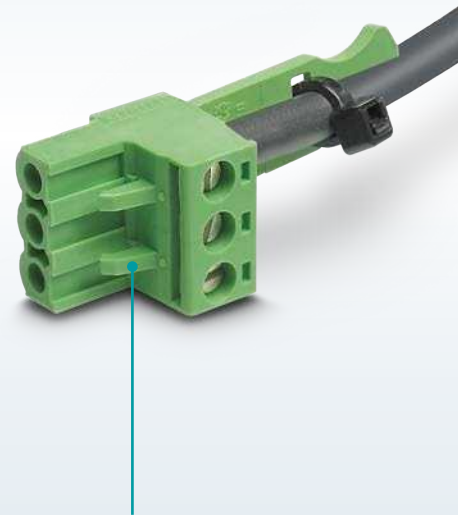

Your advantages

- ✓ Flexibility, easy installation, and cost savings compared to cable-based installations
- ✓ Bypassing of obstacles
- ✓ Alternative to slip rings that are prone to wear, and to cable lines on mobile devices
- ✓ Reduced maintenance costs
- ✓ Monitoring and control of remote stations without cable access



Wireless I/O


Digital signals
0 ... 250 V AC/DC

Analog signals:
0 ... 20 mA, 4 ... 20 mA
0 ... 10 V, HART

Wireless systems for all interfaces

Our comprehensive product range offers flexible options for implementing wireless industrial communication solutions.

Suitable wireless systems are available for a wide range of interfaces.

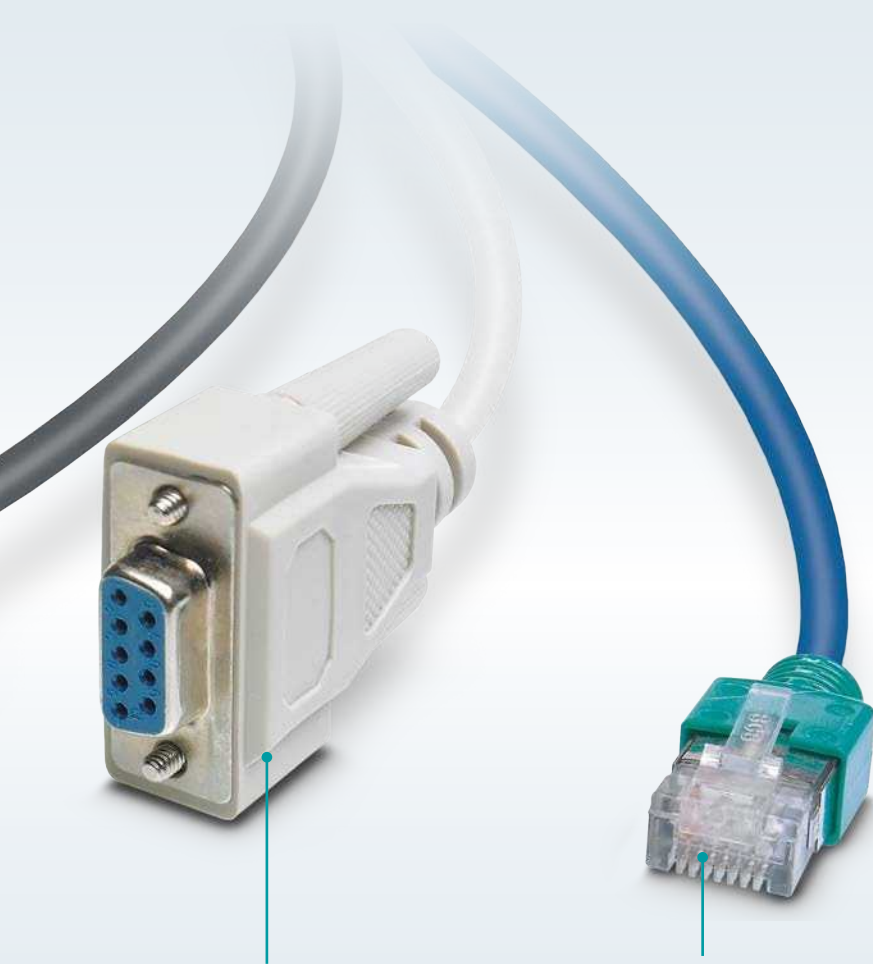

Wireless Serial



RS-232

RS-422

RS-485

Wireless Ethernet

Ethernet

EtherNet/IP



Contents





Wireless technologies	4
Wireless I/O	
Radioline – Easy signal distribution with I/O mapping	6
Radioline – I/O mapping now in wired format too	8
Radioline extension modules	10
The Wireless-MUX wireless signal cable	12
Expanding HART systems and establishing new applications	14
TC Mobile I/O for monitoring sensors via the mobile phone network	16
Wireless Serial	
Radioline for wireless networking of serial interfaces	18
Mobile network modem for worldwide communication via GSM	20
Wireless Ethernet	
Industrial Bluetooth	22
Industrial WLAN	24
Mobile routers for worldwide network access	26
Accessories	
Antenna installation - Basics and technology	28
Cables and adapters	29
Product overview	30
Services	34

Wireless technologies

The key requirement for the use of wireless technologies in industrial applications is that the technology must be as rugged and reliable as a cable connection, even under harsh conditions. With wireless communication, the data is transmitted with electromagnetic waves through free space that is not available exclusively. The wireless connection is therefore subjected to interference, such as electromagnetic interference fields, which can adversely affect transmission. In addition, reflections, fading, interference, and shadowing can occur. Despite the impacts described, the wireless systems work without interference.



Wireless technologies

Technologies				
			WLAN	
868/900 MHz, 2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz, 5 GHz	
Trusted Wireless 2.0 technology is specifically designed for the reliable transmission of data and signals over long distances.	Bluetooth wireless technology is standardized according to IEEE 802.15.1.	WirelessHART technology is standardized according to IEEE 802.15.4 and is used for the wireless networking of HART field devices in the process industry.	WLAN is a wireless standard according to IEEE 802.11 a/b/g/n for creating wireless local area networks.	Communication takes place via the mobile phone networks of the telecommunications provider.
Properties				
<ul style="list-style-type: none"> • High degree of reliability, thanks to AES encryption, frequency hopping method, and coexistence management • Range of several kilometers, thanks to adjustable data rates • Mesh networks with up to 250 nodes 	<ul style="list-style-type: none"> • Extremely reliable transmission, thanks to redundant transmission channels • High coexistence capability in unfamiliar wireless environments, parallel operation of several Bluetooth systems at one location, thanks to efficient frequency usage • Range of up to 200 m • Short delay times 	<ul style="list-style-type: none"> • Extremely secure transmission protected against manipulation with 128 bit AES encryption • High degree of reliability, thanks to full-mesh routing • Very low energy consumption, thanks to time-synchronized communication 	<ul style="list-style-type: none"> • High data rates of up to 54 Mbps or 300 Mbps • Fast roaming • Device mobility in wide area networks • High degree of reliability, thanks to MIMO technology 	<ul style="list-style-type: none"> • Available worldwide • Use of international mobile phone standards (GPRS, EDGE, UMTS, HSPA, LTE, etc.) • Data rates of up to 150 Mbps on the LTE network • Inexpensive alarm generation via SMS
Applications				
<ul style="list-style-type: none"> • Wireless I/O: Analog, digital I/O signals (support modular expansion) • Wireless Serial: Serial RS-232, RS-485 data 	<ul style="list-style-type: none"> • Wireless I/O: Analog, digital I/O signals • Wireless Ethernet: Ethernet data 	<ul style="list-style-type: none"> • Wireless I/O: Analog HART signals 	<ul style="list-style-type: none"> • Wireless Ethernet: High-speed Ethernet transmission 	<ul style="list-style-type: none"> • Wireless I/O: Analog, digital I/O signals • Wireless Serial: Serial RS-232 data • Wireless Ethernet: Ethernet data • Alarm generation: SMS, e-mail

Industrial Wireless in process technology and production automation

Process technology systems often feature widely distributed outdoor system structures. Measured values only ever change very gradually. In contrast to process technology systems, systems used in production automation are often physically restricted in terms of space. Large amounts of data have to be transferred in a very short amount of time. We offer the suitable wireless system for every application.



System expansion and post installation



Dynamic applications

Wireless I/O

Radioline – Easy signal distribution with I/O mapping

Radioline is the wireless system for large systems and networks.

Special features include extremely easy assignment of inputs and outputs by simply turning the thumbwheel - without any programming. Radioline transmits I/O signals as well as serial data and is therefore very versatile. In addition, you can implement various network structures: from a simple point-to-point connection to complex networks.



**TRUSTED
WIRELESS™**



Your advantages

- ✓ Easy startup without programming
- ✓ One device for a range of applications
- ✓ Integrated RS-232 and RS-485 interface
- ✓ Trusted Wireless 2.0 technology
- ✓ Adjustable data rates for the wireless interface
- ✓ 128-bit data encryption (AES)

Product overview Radioline front modules



868 MHz wireless module

RAD-868-IFS (Europe) Order No. [2904909](#)

- Supply voltage: 19.2 ... 30.5 V DC
- Adjustable transmission power of up to 500 mW
- Can be extended with I/O modules via DIN rail connectors
- Expanded temperature range: -40°C ... +70°C
- Antenna connection: RSMA (female)
- Approvals: ATEX, IECEx
- Suitable for large distances with obstacles



900 MHz wireless module

RAD-900-IFS (America) Order No. [2901540](#)
 RAD-900-IFS-AU (Australia, New Zealand) Order No. [2702878](#)

- Supply voltage: 10.8 ... 30.5 V DC
- Adjustable transmission power of up to 1000 mW
- Can be extended with I/O modules via DIN rail connectors
- Expanded temperature range: -40°C ... +70°C
- Antenna connection: RSMA (female)
- Approvals: UL 508, HazLoc, FCC
- Suitable for large distances with obstacles



2.4 GHz wireless module


RAD-2400-IFS (worldwide) Order No. [2901541](#)
 RAD-2400-IFS-JP (Japan) Order No. [2702863](#)

- Supply voltage: 19.2 ... 30.5 V DC
- Adjustable transmission power of up to 100 mW
- Can be extended with I/O modules via DIN rail connectors
- Expanded temperature range: -40°C ... +70°C
- Antenna connection: RSMA (female)
- Approvals: ATEX, IECEx, UL 508, HazLoc, FCC (only RAD-2400-IFS)
- Radioline accessories can be found on page 33

Signal transmission with the Radioline wireless system


I/O to I/O

Radioline enables easy I/O signal distribution throughout the network and the creation of various network structures – from a simple point-to-point connection to complex networks.

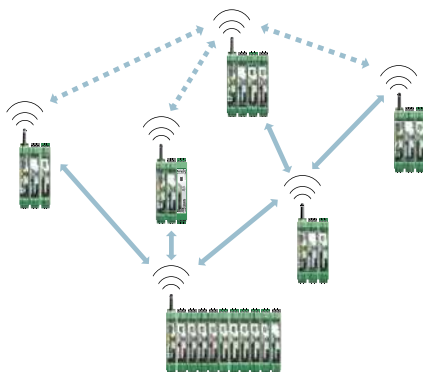


I/O to serial (Modbus RTU)

With Radioline, I/O modules can be connected to the controller directly via the integrated RS-232 and RS-485 interface by means of wireless communication using the Modbus protocol.

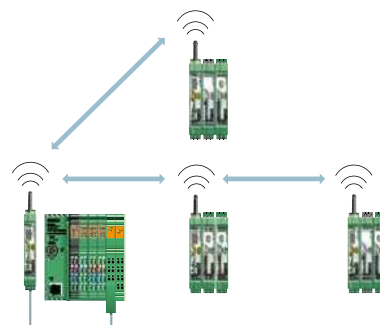

Serial to serial (transparent)

Radioline can be used to network multiple controllers or serial I/O devices quickly and easily using wireless technology. In this way, serial RS-232/RS-485 cables can be replaced.

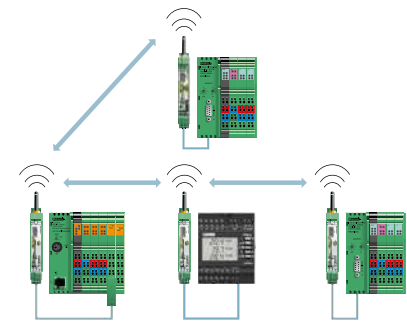


Wireless I/O

Radioline – I/O mapping now in wired format too

The popular, straightforward method of distributing I/O information using thumbwheels on the front of the equipment is now also available for RS-485 networks. Addressing the new RS-485 front module is quick and easy too – all it takes is a turn of the yellow thumbwheel. This enhances the Radioline system's flexibility, allowing you to use it for solutions in even more applications.

Alternative transmission media

To increase the range, you can of course replace the RS-485 line with alternative transmission media. Phoenix Contact offers a range of converters for fiber-optic cables, SHDSL, wireless, or Ethernet technology.

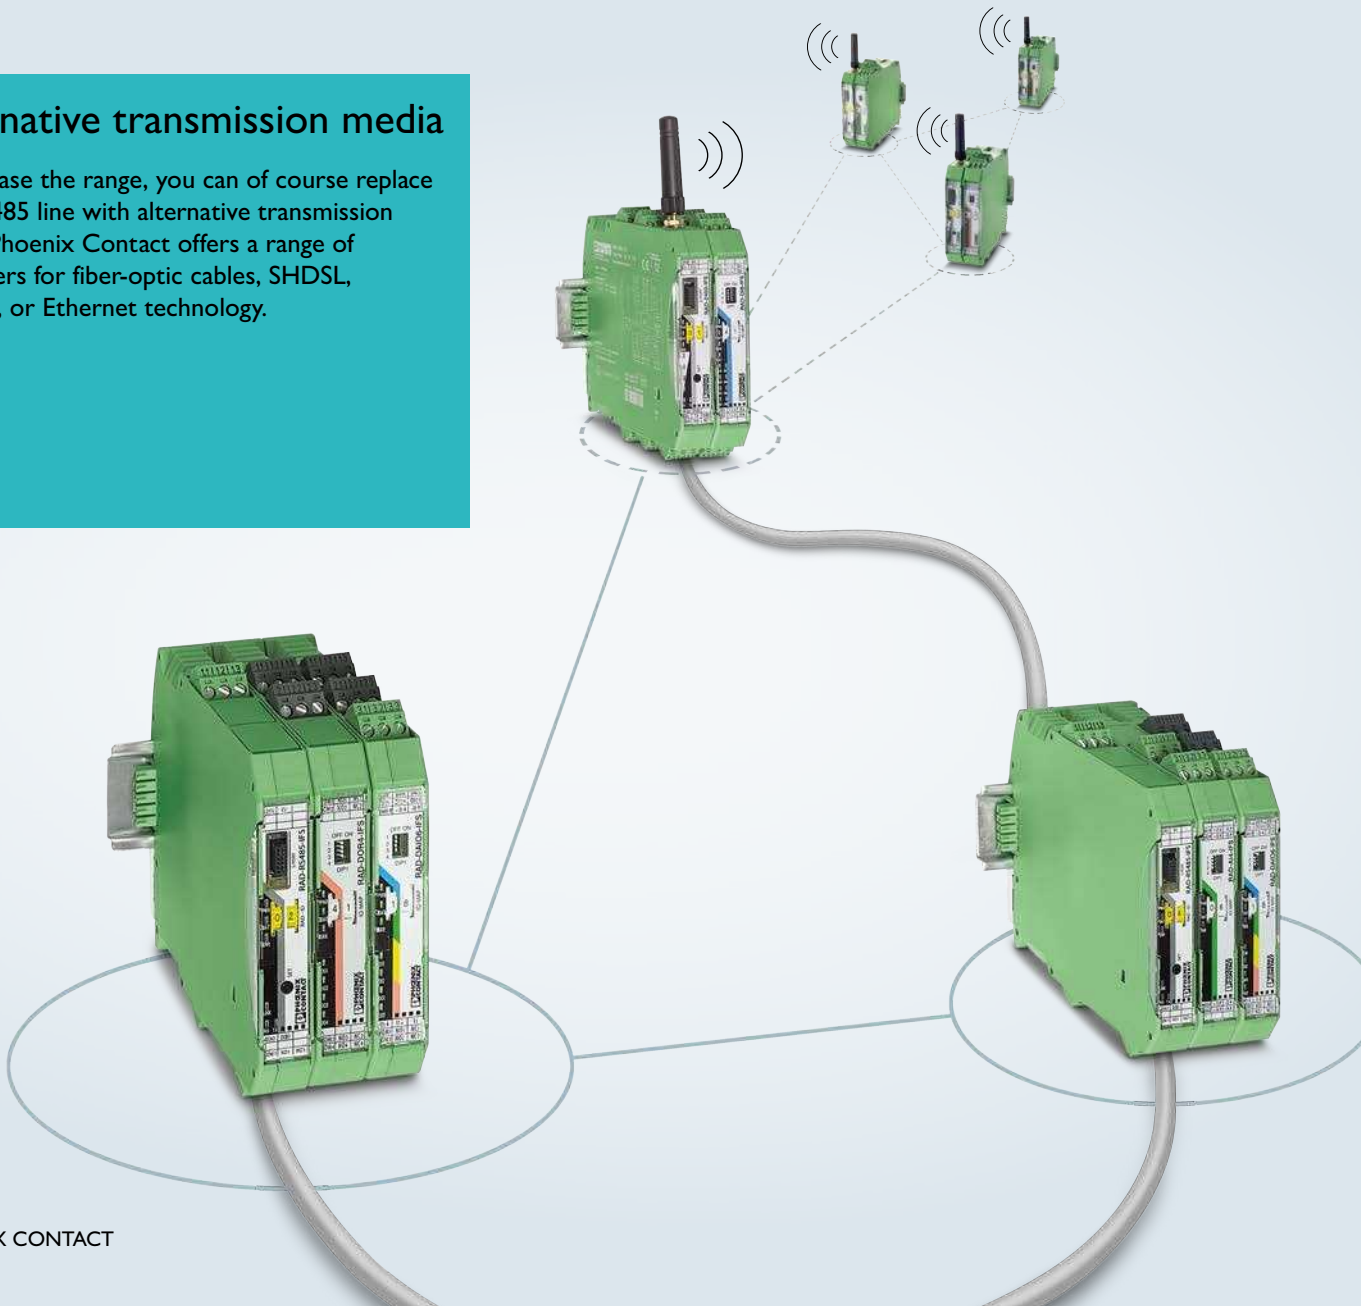

Product overview Radioline bus module



RS-485 bus module


RAD-RS485-IFS

Order No. [2702184](#)

- Expanded temperature range: -40°C ... +70°C
- RS-485 2-wire connection (screw terminal block)
- Worldwide use
- Range: 1200 m or more with converter or repeater
- Can be extended with I/O modules via DIN rail connectors
- Supply voltage: 19.2 ... 30.5 V DC


Signal transmission with the Radioline RS-485 bus module

A network may consist either entirely of wireless stations or entirely of RS-485 stations. Alternatively, it is also possible to combine a wireless network with RS-485 stations.

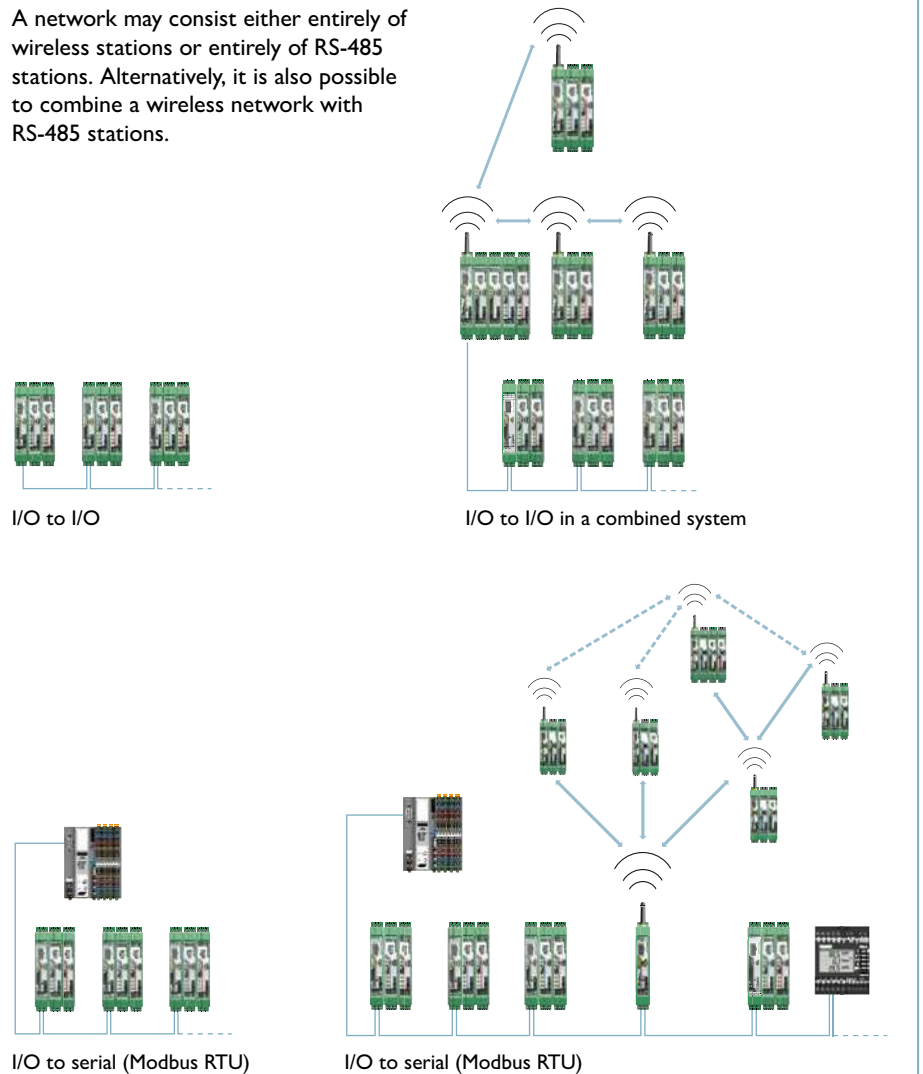

Connection to the wireless system

A Radioline wireless system on an existing master can be expanded to include new RS-485 stations. The wireless and RS-485 modules form a combined system.

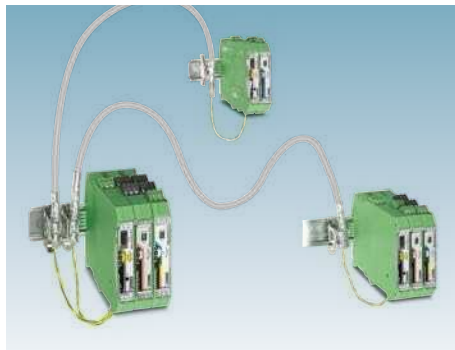

Multipoint multiplexer

In an RS-485 network with up to 99 Radioline stations, you can now distribute I/O signals between stations entirely without the need for software configuration – all it takes is a turn of the wheel.



Stand-alone operation as a Modbus slave

The new Radioline RS-485 stations can also be operated on any Modbus RTU master.

Wireless I/O


Radioline extension modules

Various extension modules are available for expanding the Radioline wireless system quickly and easily. They enable the transmission of digital and analog signals as well as temperature signals.

All extension modules are certified according to 94/9/EC (ATEX) directives and can therefore be used internationally in potentially explosive areas.

Your advantages

- ✓ I/O extension modules – can be used on all front modules (see page 7)
- ✓ Modular expansion possible
- ✓ Easy module replacement even during operation (hot swap-capable)
- ✓ Channel-to-channel electrical isolation
- ✓ Expanded temperature range: -40°C ... +70°C

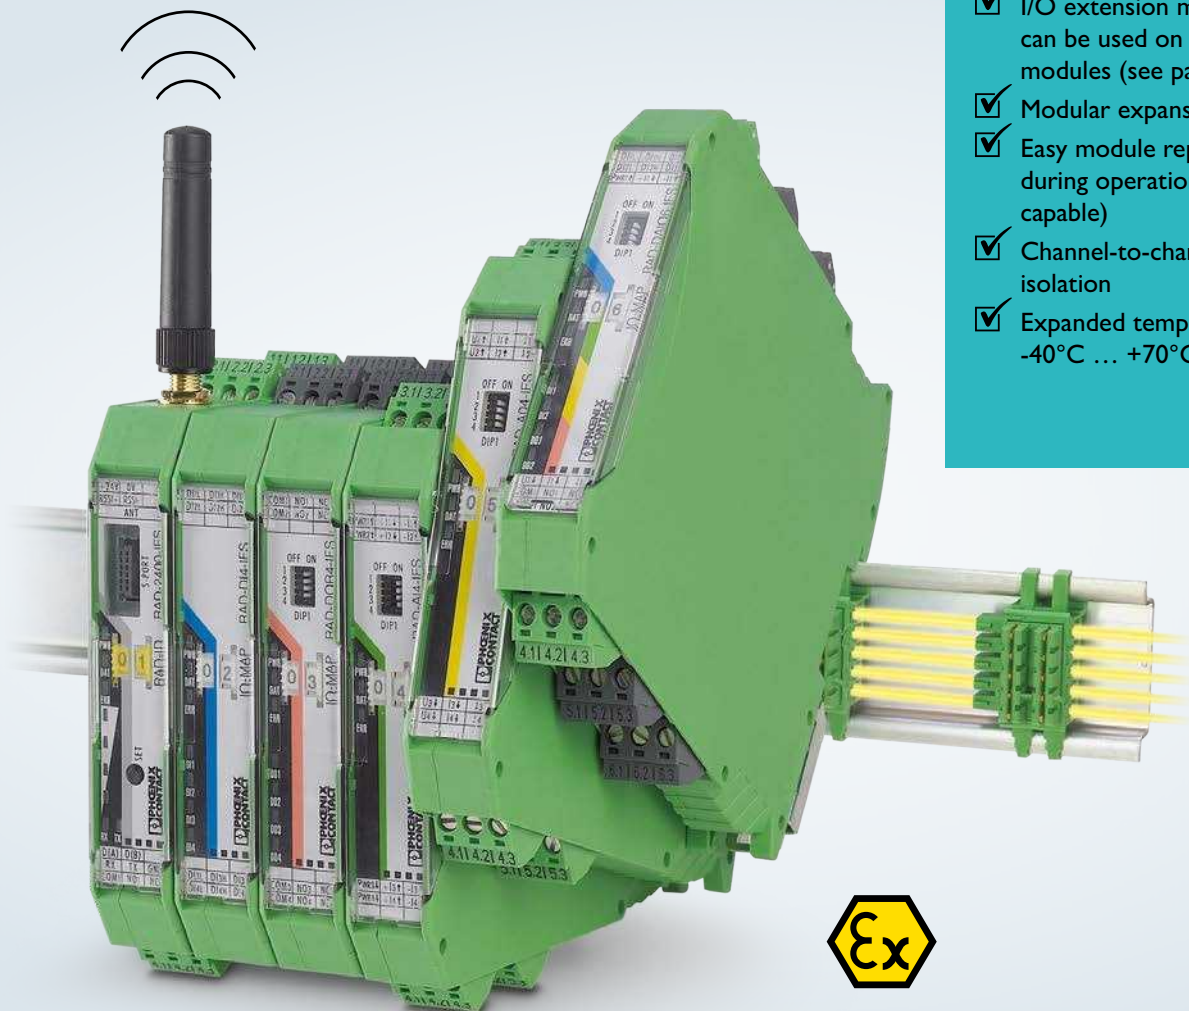

Product overview Radioline extension modules



Digital extension modules

RAD-DI4-IFS Order No. [2901535](#)
RAD-DOR4-IFS Order No. [2901536](#)

- 4 digital wide-range inputs:
0 ... 250 V AC/DC
- 4 digital relay outputs:
24 V DC/250 V AC/5 A

RAD-DI8-IFS Order No. [2901539](#)
RAD-DO8-IFS Order No. [2902811](#)

- 8 digital inputs: 0 ... 30.5 V DC
- 2 pulse inputs: 100 Hz, 32 bit
- 8 digital transistor outputs:
30.5 V DC/200 mA

Analog/Pt 100 extension module

RAD-AI4-IFS Order No. [2901537](#)
RAD-AO4-IFS Order No. [2901538](#)

- 4 analog inputs: alternatively 0/4 ... 20 mA
- 4 analog outputs:
alternatively 0/4 ... 20 mA, 0 ... 10 V DC

RAD-PT100-4-IFS Order No. [2904035](#)

- 4 Pt100 inputs
- Temperature measuring range:
-50°C ... +250°C
- 2/3-wire connection

Analog/digital extension module

RAD-DAIO6-IFS Order No. [2901533](#)

- 1 analog input: alternatively 0/4 ... 20 mA
- 1 analog output:
alternatively 0/4 ... 20 mA, 0 ... 10 V DC
- 2 digital wide-range inputs/outputs:
0 ... 250 V AC/DC




Easy installation

Create a modular wireless station in the control cabinet and extend or replace it easily during operation.



Unique addresses for front modules

Set a unique address on the front module by simply turning the thumbwheel.

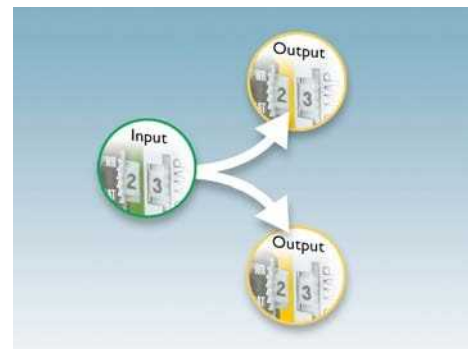

Distribute inputs and outputs

On the I/O module, the thumbwheel is used to assign the inputs and outputs by creating pairs, thereby easily distributing the I/O signals in the system (I/O mapping).


Wireless I/O

The Wireless-MUX wireless signal cable

The wireless multiplexer transmits 16 digital and two analog signals bidirectionally, i.e. in both directions, which means that it can replace a 40-wire signal cable. The connection is constantly monitored in the process. If there is gross interference in the link or it is interrupted, the outputs are reset to the defined LOW state. This is indicated on the module by a diagnostic LED. The link quality display provides the user with constant information on the quality of the link.

Your advantages

- ✓ Connections established and signals transmitted automatically based on fixed pairing
- ✓ No configuration or settings required
- ✓ Typical transmission time of less than 10 ms
- ✓ Extremely rugged and reliable
- ✓ Interference-free operation alongside WLAN

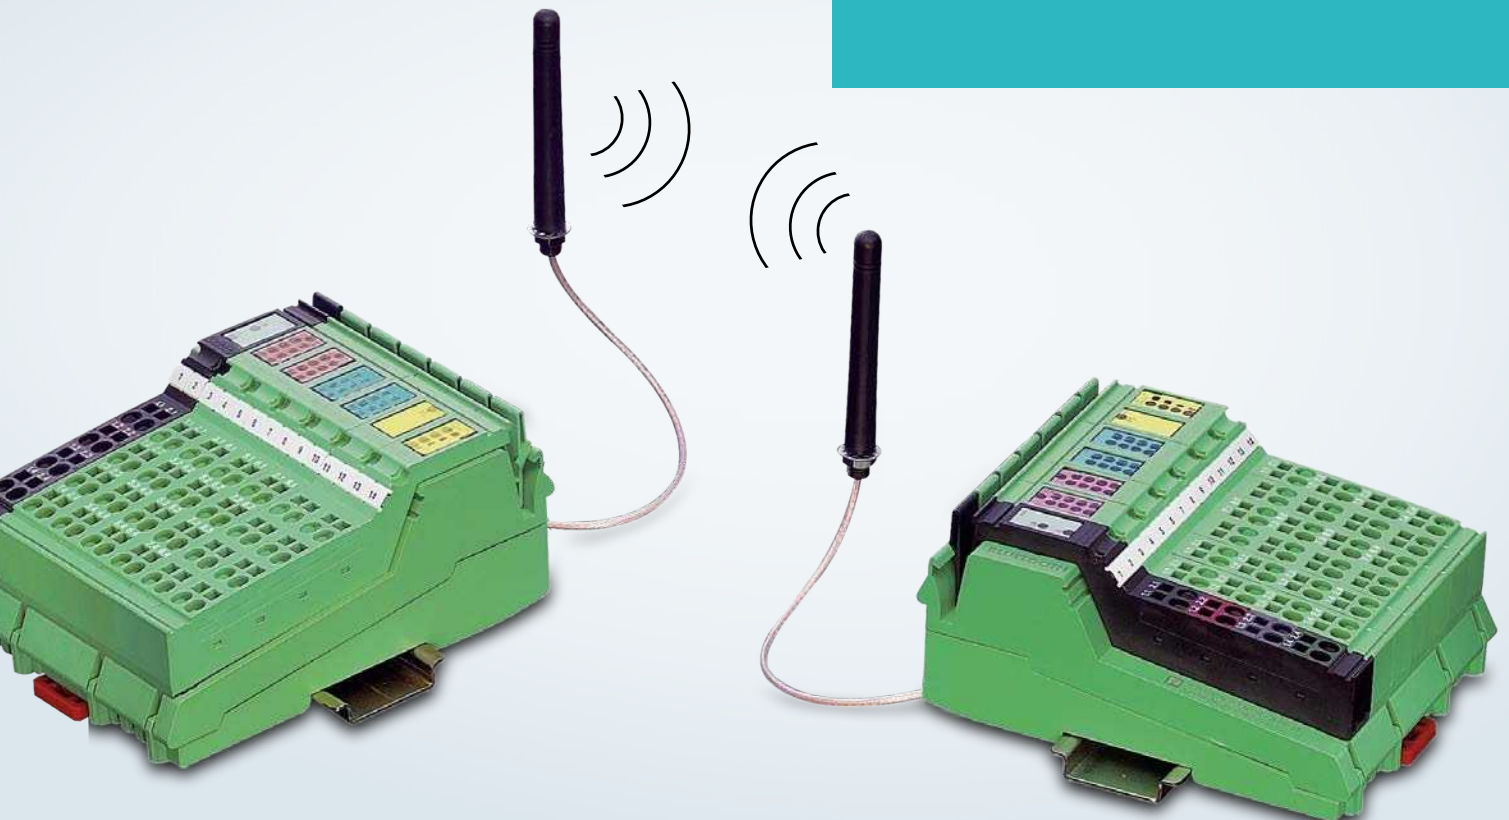

Product overview mobile sets



Mobile set with antennas

ILB BT ADIO MUX-OMNI Order No. [2884208](#)

- Standard package consisting of two permanently paired modules, two omnidirectional antennas with 1.5 m cable
- Ranges between 50 and 100 m in halls and over 200 m outdoors
- Antenna connection: RSMA (female)
- Approvals: FCC, UL 508, MIC (Japan)

Mobile set without antennas

ILB BT ADIO MUX Order No. [2702875](#)


- Package consisting of two permanently paired modules
- Ranges of over 400 m with panel antennas with a free line of sight
- Antenna connection: RSMA (female)
- Approvals: FCC, UL 508, MIC (Japan)

Technical data for mobile sets:

- Current Bluetooth 4.0 technology
- Supply voltage: 19.2 V DC ... 30 V DC
- 16 digital inputs
- 16 digital outputs up to 500 mA
- 2 analog inputs/outputs 0 ... 20 mA or 0 ... 10 V

Wireless-MUX, the wireless signal cable

Connection to the controller is quick and easy using existing input and output channels.

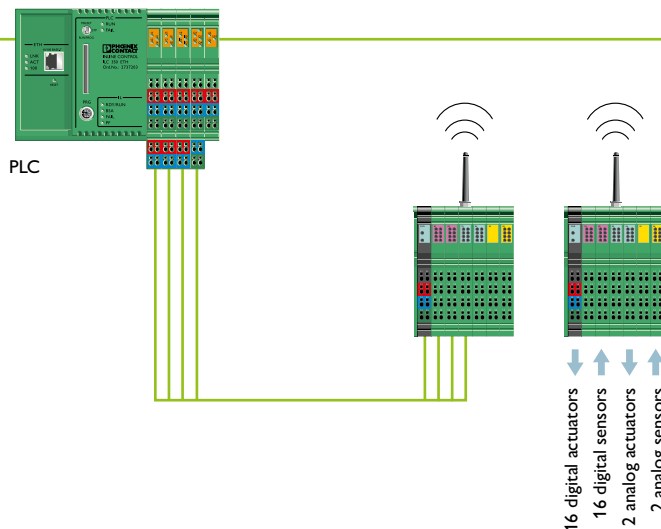

Ready to use: unpack, connect, and switch on

Possible areas of application

The Wireless-MUX is used wherever a small number of digital or analog input and output signals need to be exchanged wirelessly with a remote or movable station. Factory automation in particular is characterized by machine parts that are constantly in motion.




Dynamic applications

Wireless I/O

Expanding HART systems and establishing new applications

By using a WirelessHART adapter and the gateway, it is possible to adapt existing systems to new regulations, optimize maintenance schedules or acquire standard data. The gateway can communicate with the control system via Modbus/TCP, HART-IP, and FDT/DTM. Thanks to the use of HART-IP or FDT/DTM framework structures, remote devices can be fully configured via the wireless network.

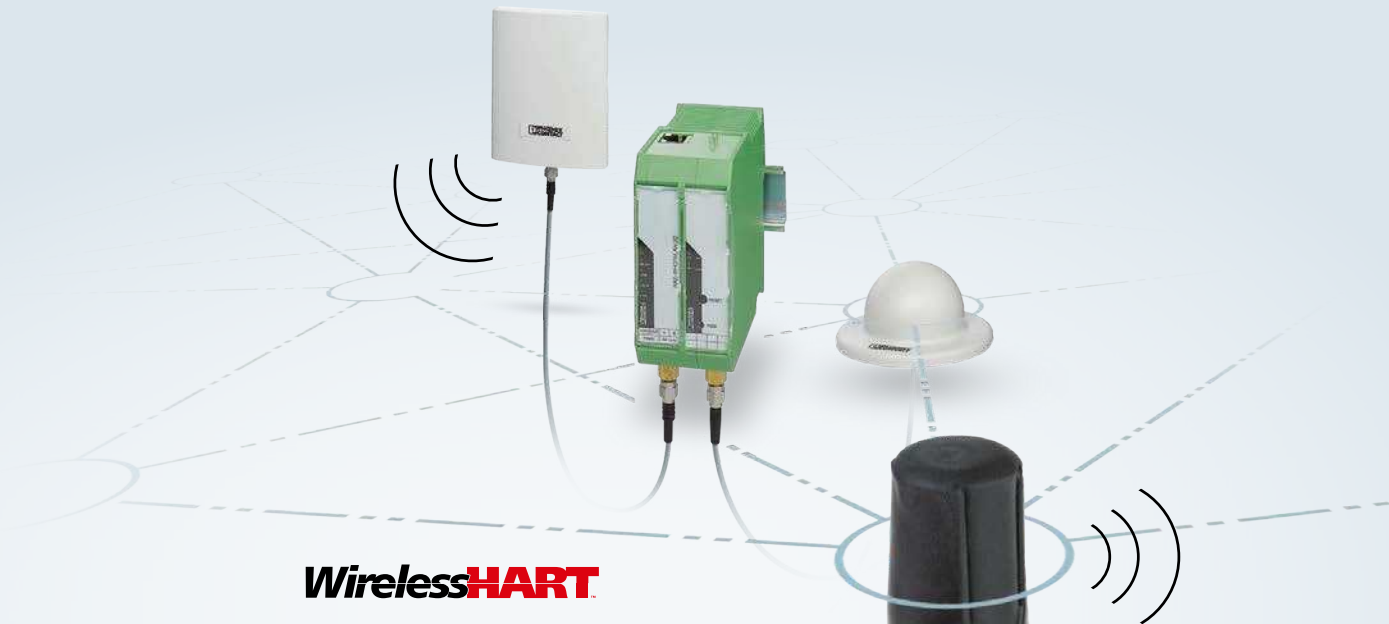

Your advantages

- ✓ Use of the same maintenance and diagnostic tools as wired HART devices
- ✓ Integrated WLAN client enables the gateways to be installed directly in the field, thereby establishing a reliable network
- ✓ Lower material and installation costs compared to wired solutions
- ✓ Labor costs saved



Product overview HART systems



WirelessHART gateway

RAD-WHG/WLAN-XD Order No. **2900178**

- Enables HART data from field devices to be accessed via Modbus/TCP or HART-IP
- Supports up to 250 WirelessHART field devices
- Easy programming and diagnostics by means of integrated web server



WirelessHART adapter:

RAD-WHA-1/2NPT Order No. **2900100**

- Up to four HART devices or one 4 ... 20 mA non-HART device can be connected to one adapter
- Power supply:
Loop-powered or 24 V DC
- Removable antenna for connecting a coaxial cable and a high-gain antenna

The solution for retrofit and new installations

Retrofit installation


WirelessHART can:

- Meet new directives
- Increase efficiency
- Lower maintenance costs

New installation

WirelessHART can:

- Accelerate system extension
- Reduce start time
- Lower investment costs

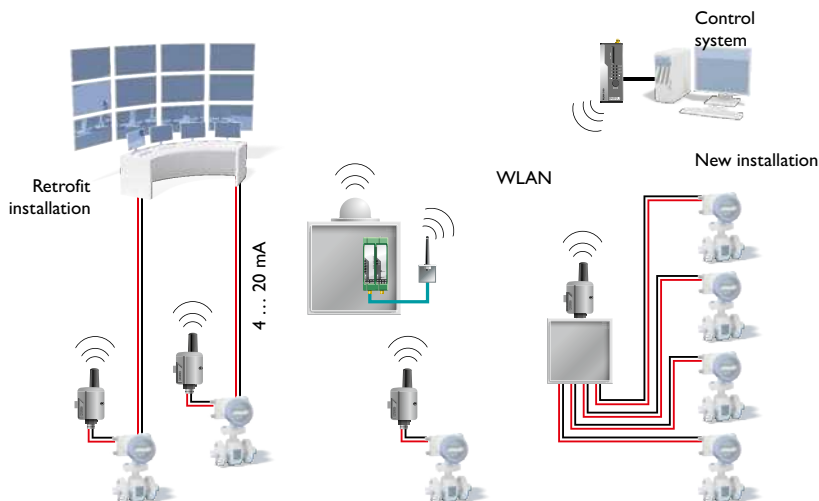

Possible areas of application

Conventional analog field devices in the process industry which are connected to non-HART-compatible control systems can be expanded easily in terms of their function without needing to replace the existing controller hardware by using WirelessHART networks. A wide range of parameterization and diagnostic functions are integrated into the existing system without having to stop the process.



Applications in the process industry

Wireless I/O

TC Mobile I/O for monitoring sensors via the mobile phone network

Monitor analog and digital values easily and securely via the mobile phone network and switch relays remotely. The mobile radio module TC Mobile I/O sends your data event-driven as a text message and e-mail or continuously notifies by means of GPRS (ODP protocol). Thanks to the large voltage range and the various inputs, the signaling system can be used in a wide range of applications.



Your advantages

- ✓ Suitable for buildings and harsh industrial environments
- ✓ Monitoring of connected sensors (0/4 ... 20 mA)
- ✓ Monitoring of voltages up to 60 V
- ✓ Relay switching via the mobile phone network
- ✓ SMS, e-mail, or OPD communication
- ✓ Large supply voltage range (AC or DC)

Product overview TC Mobile I/O



Mobile radio module, DC

TC MOBILE I/O X200 Order No. [2903805](#)
Remote signaling system, SMS/e-mail

TC MOBILE I/O X300 AC Order No. [2903807](#)
Remote control system, GPRS (ODP protocol)

- 4 digital inputs
- 4 relay outputs
- 2 analog inputs for current or voltage
- Voltage range: 10 V DC ... 60 V DC



Mobile radio module, AC

TC MOBILE I/O X200 AC Order No. [2903806](#)
Remote signaling system, SMS/e-mail

TC MOBILE I/O X300 AC Order No. [2903808](#)
Remote control system, GPRS (ODP protocol)

- 4 digital inputs
- 4 relay outputs
- Voltage range: 93 V AC ... 250 V DC

TC Mobile I/O app

This app allows you to switch your outputs conveniently and easily check the status of your device at any time. The TC Mobile I/O app makes it even easier to handle the text message version and saves you from having to write a text message. You will receive the alarm as usual via SMS and e-mail. This makes it easy to be contacted in the field.



iOS




Android

Monitoring sensors via the mobile phone network

The TC Mobile I/O product range allows you to monitor analog current levels and analog voltage values and switch relays remotely. Communication takes place via SMS, e-mail or with an ODP server.

Possible areas of application:

- Machine, building, and system monitoring
- Pumps, wastewater treatment plants, and water supply
- Lighting control systems and remote switchgear
- Street lighting
- Elevators and gates
- Alarm technology and building services
- HVAC technology
- Battery monitoring up to 60 V
- Railway applications according to EN 50121-4

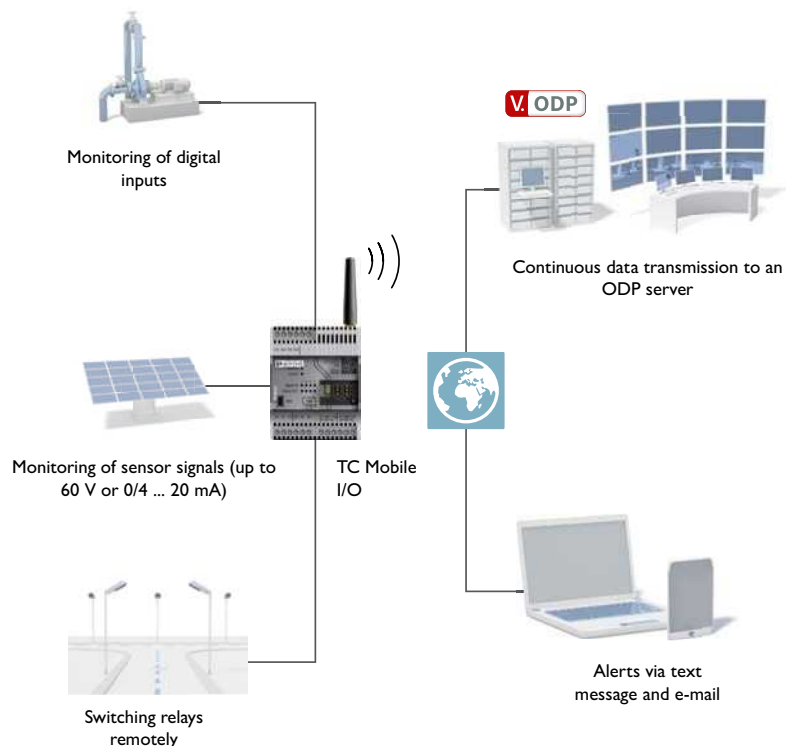

Wireless Serial

Radioline for wireless networking of serial interfaces

The wireless module can be used to wirelessly network multiple controllers or serial I/O devices quickly and easily via RS-232 and RS-485 serial interfaces. Data transmission is transparent, which means that any protocols, such as Modbus, can be forwarded. In addition, various network structures can be implemented: from a simple point-to-point connection to complex mesh networks.



TRUSTED
WIRELESS™



Your advantages

- ✓ Quick and easy startup
- ✓ Easy point-to-point or network connections (star, mesh)
- ✓ Can be extended with up to 32 I/O modules per station via DIN rail connector (hot-swappable)
- ✓ I/O-to-I/O, I/O-to-serial, serial-to-serial
- ✓ Trusted Wireless 2.0 technology
- ✓ Adjustable data rates for the wireless interface (16 ... 500 kbps)
- ✓ 128-bit data encryption (AES)



RS-232
RS-485



Product overview Radioline



Wireless module

RAD-868-IFS (Europe)	Order No. 2904909
RAD-900-IFS (Canada, North/South America)	Order No. 2901540
RAD-2400-IFS (worldwide)	Order No. 2901541
RAD-2400-IFS-JP (Japan)	Order No. 2702863

- Integrated RS-232 and RS-485 interface
- Can be extended with I/O modules via DIN rail connectors
- Expanded temperature range: -40°C ... +70°C

I/O extension modules

Digital IN:	
RAD-DI4-IFS	Order No. 2901535
RAD-DI8-IFS	Order No. 2901539
Digital OUT:	
RAD-DOR4-IFS	Order No. 2901536
RAD-DO8-IFS	Order No. 2902811


- Radioline accessories can be found on page 33

Analog/Digital IN/OUT:	
RAD-DAIO6-IFS	Order No. 2901533
Analog IN:	
RAD-AI4-IFS	Order No. 2901537
Analog OUT:	
RAD-AO4-IFS	Order No. 2901538
Temperature IN:	
RAD-PT100-4-IFS	Order No. 2904035

Replacement for serial cabling

Connect your controller to serial field devices using wireless technology. The slaves are connected directly or via repeater slave intermediate stations. You can connect up to 250 repeater slaves one after the other in order to extend

the wireless path, for example. Serial I/O devices and I/O extension modules can be connected to the intermediate stations.

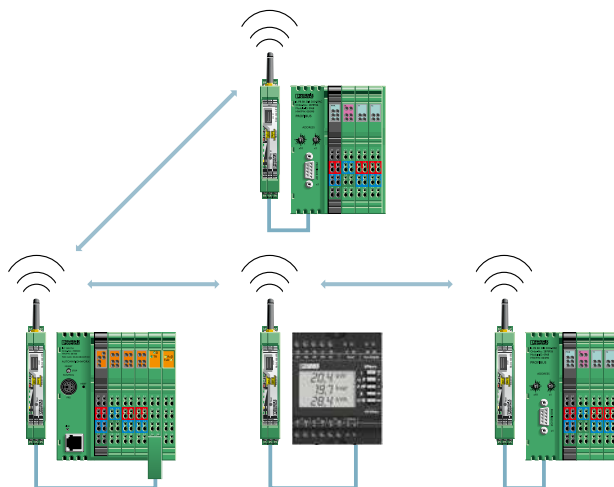


Wireless networking of serial devices

Convenient software diagnostics

All network devices can be monitored easily via the master:

- Online diagnostics: Network structure design, signal quality of each network station (RSSI), recording of RSSI signal and I/O status of each networked station
- Exclusion of up to two frequency bands (WLAN channels)
- Extended network settings

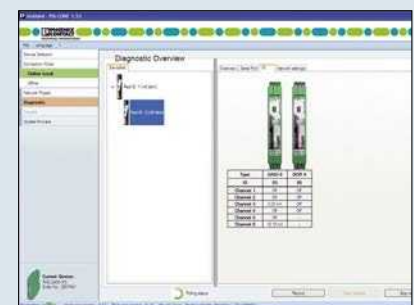

Comprehensive diagnostics

Wireless Serial

Mobile network modem for worldwide communication via GSM

The GSM/GPRS modem can be used in all GSM networks and enables worldwide access to machines and systems. Using wireless remote maintenance it is therefore possible to avoid downtimes and minimize costs. Permanent GPRS connections are ideal for remote connections, and the warning or alarm inputs are useful for alarm generation.




Your advantages

- ✓ Easy startup by means of plug and play
- ✓ User-friendly configuration software
- ✓ Tried-and-tested interaction with controllers and industrial PCs from many manufacturers

Applications for serial mobile network modems


Automatic alarm generation

The configurable warning and alarm inputs are particularly suitable for easy remote system monitoring. If these inputs are activated, the modem calls user-defined numbers and sends stored text messages by fax and/or SMS.

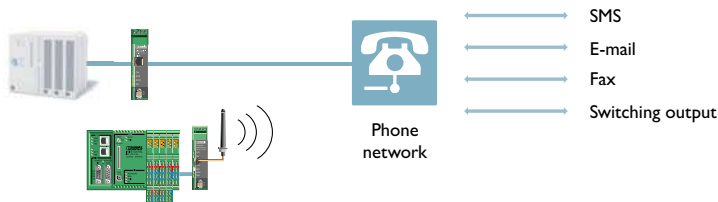

GPRS functionality "always online"

The GPRS connections are ideal for process data acquisition where permanent communication is required. These connections are not billed based on the connection time, but rather the volume of data and can therefore maintain a permanent Internet connection.

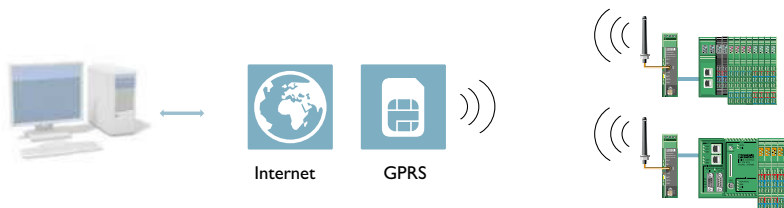


Remote control connection

GPRS connections are used for remote control connections with constant communication to substations.



Secure dial-up connection establishment

Portable machines or remote systems can be reached via GSM networks by directly dialing a data telephone number (CSD). This connection can be made secure by means of password protection as an option.

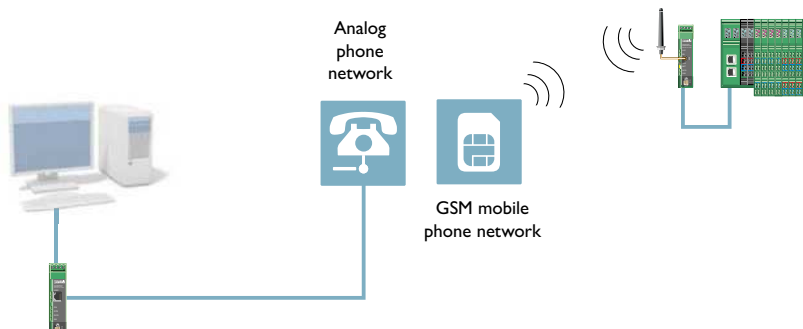

GSM/GPRS modem with RS-232 interface

PSI-GPRS/GSM-MODEM/RS232-QB

Order No. [2313106](#)

- Can be used in all 850 MHz, 900 MHz, 1800 MHz, and 1900 MHz GSM networks
- Integrated TCP/IP stack
- Password protection, selective call acceptance, callback function
- PIN stored in modem is encrypted
- Supply voltage: 10.8 V DC ... 30 V DC

Industrial mobile phone data transmission

Modern mobile phone technology offers efficient, high-performance communication for many industrial applications. The mobile phone quick start guide answers the most frequently asked customer questions in terms that are as brief and easily comprehensible as possible and provides practical tips.




MNR 52000746

Wireless Ethernet

Industrial Bluetooth

The industrial Bluetooth modules allow you to wirelessly transmit control data to mobile or difficult to access automation devices quickly and easily. Bluetooth communication is characterized by particularly robust transmission under difficult ambient conditions.

The FL BT EPA wireless modules allow you to transmit industrial protocols like PROFINET without any problems. Even functionally safe communication is supported via PROFIsafe or SafetyBridge Technology.

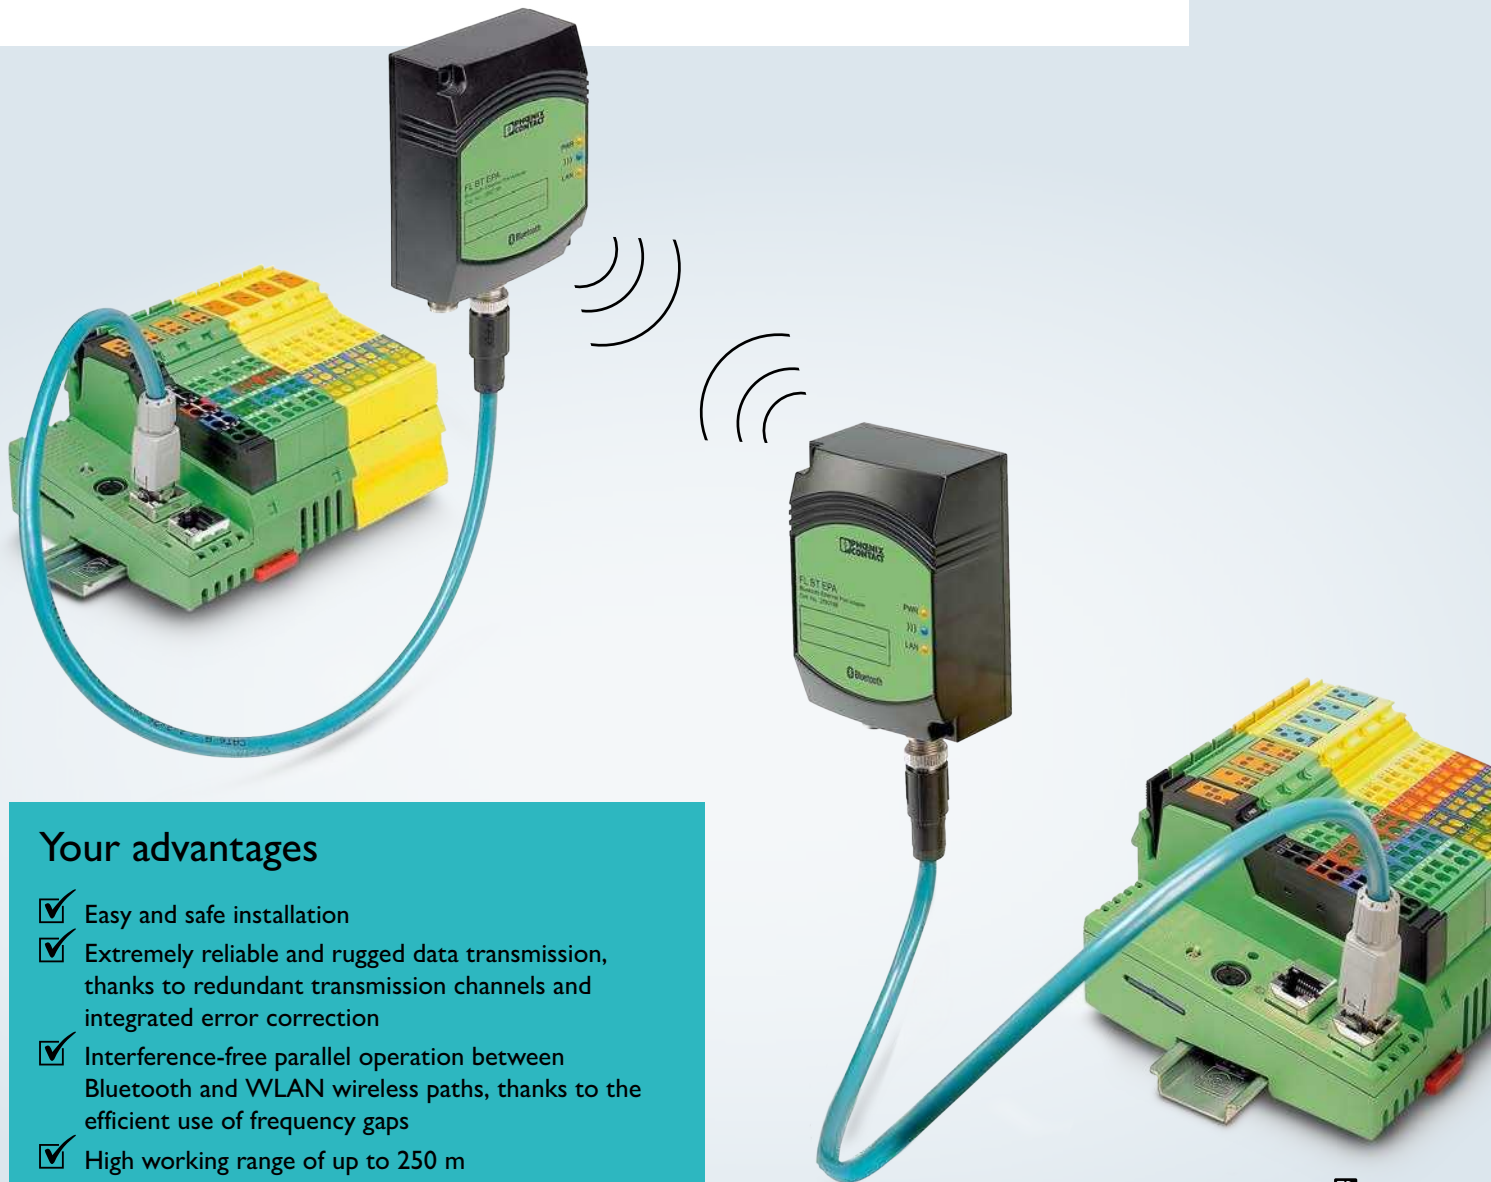

Your advantages

- ✓ Easy and safe installation
- ✓ Extremely reliable and rugged data transmission, thanks to redundant transmission channels and integrated error correction
- ✓ Interference-free parallel operation between Bluetooth and WLAN wireless paths, thanks to the efficient use of frequency gaps
- ✓ High working range of up to 250 m

SafetyBridge Technology[®]
Designed by PHOENIX CONTACT

Product overview Industrial Bluetooth



Bluetooth Ethernet adapter

FL BT EPA

Order No. [2692788](#)

- Internal antenna
- Maximum of one concurrent wireless connection

Technical data:

- Frequency band 2.4 GHz, 128-bit data encryption, WLAN black channel list, low emission mode (LEM)
- IP65 degree of protection, M12 connections for power and LAN



Bluetooth Ethernet adapter set

FL BT EPA AIR SET

Order No. [2693091](#)

- Set consisting of:
2 x FL BT EPA, cable, and plug

- Autocrossing, PROFINET prioritization, LLDP
- Power supply: 9 ... 30 V DC
- Temperature range: -40°C ... +65°C
- Configuration using the web interface, SNMP and AT commands



Bluetooth access point

FL BT EPA MP

Order No. [2701416](#)


- External, replaceable antenna (supplied)
- Connection: RSMA (male)
- Maximum of seven simultaneous wireless connections

- UL/cUL Class 1 Div 2 Hazardous location
- Accessories: Assembly adapter ([2701134](#)), DIN rail adapter ([2701133](#))

Bluetooth applications

The Bluetooth BT EPA modules replace individual Ethernet or PROFINET cables leading to automation devices with a reliable wireless connection.

The BT EPA MP enables up to seven Bluetooth modules to be connected to the Ethernet network at the same time.

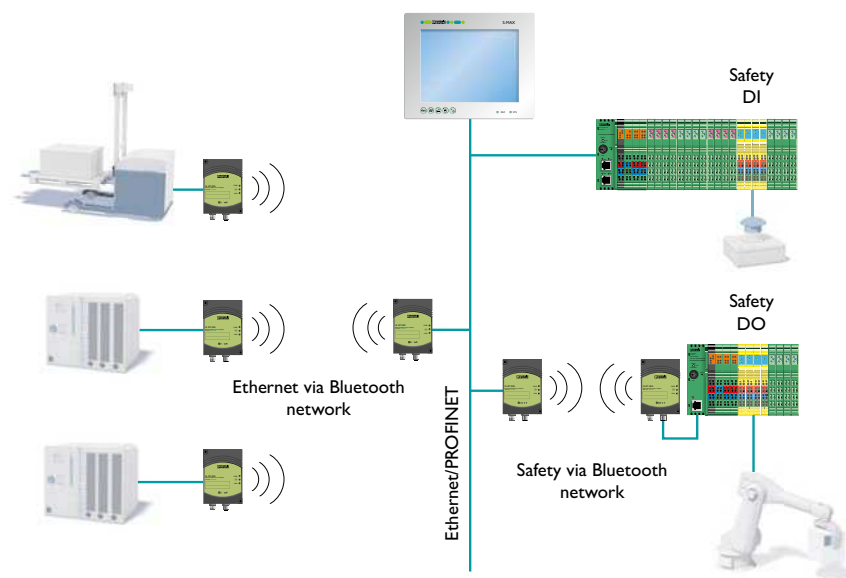

Possible areas of application

Bluetooth enables mobile devices to be integrated into industrial control networks wirelessly, thereby eliminating the need for expensive cable runs that are prone to wear.

- Robots and traveling robots
- Handling machines, packaging machines, pallet wrapping machines
- Moving machine parts
- Cranes and lifting equipment



Industrial Bluetooth on cranes

Wireless Ethernet

Industrial WLAN

Use industrial WLAN components for wireless machine access with smart devices or as a robust communication with mobile machine parts. Industrial wireless systems also provide for more flexibility and efficiency for the reliable communication between controller and autonomous transport systems, warehouse shuttles or carries.

The industrial WLAN components WLAN 5100 and WLAN 1100 support you with the implementation of high performance and modern MIMO technology.

Your advantages

- ✓ Create industrial WLAN networks easily and reliably
- ✓ Particularly secure, thanks to the latest security standards and encryption
- ✓ Ideal for networks with a large number of devices
- ✓ Maximum mobility, with fast roaming functions
- ✓ Suitable for time-critical applications, such as PROFINET or safety



Product overview Industrial WLAN



WLAN 5100 access point

FL WLAN 5100 (Europe) Order No. **2700718**
 FL WLAN 5101 (USA and Canada)
 Order No. **2701093**
 FL WLAN 5102 (Japan) Order No. **2701850**
 SD-FLASH 2 GB Order No. **2988162**

- IEEE 802.11 a/b/g/n, WLAN access point, client, repeater, frequency band 2.4 GHz and 5 GHz, MIMO technology 3 x 3:2, up to 300 Mbps, cluster management



WLAN 1100 wireless module

FL WLAN 1100 (Europe) Order No. **2702534**
 FL WLAN 1101 (USA and Canada)
 Order No. **2702538**

- IEEE 802.11 a/b/g/n, WLAN access point and client, frequency band: 2.4 GHz and 5 GHz, 2 integrated antennas with MIMO technology, power supply: 24 V DC, degree of protection: IP54 top, IP20 bottom
- Accessories: Adapter for applications in the field (Order No. **2702544**)

Possible areas of application

Wireless LAN is particularly suitable for implementing a system-wide wireless infrastructure:


- Mobile maintenance
- Electric monorail systems
- Automated guided vehicle systems and forklift trucks
- Storage and retrieval machines and warehouse shuttles
- Video monitoring



Wireless LAN in high-bay warehouse systems

Typical WLAN network structure


The powerful WLAN 5100 and the compact WLAN 1100 are the perfect complements for wireless communication in the machine environment.

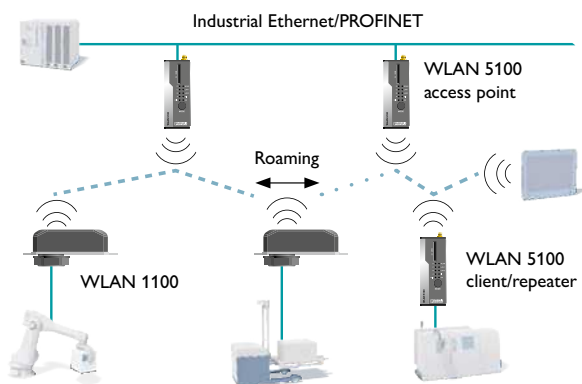

Wireless machine communication with industrial WLAN

Connecting smart devices

The WLAN 1100 allows an easy connection of smart devices to machines and systems.

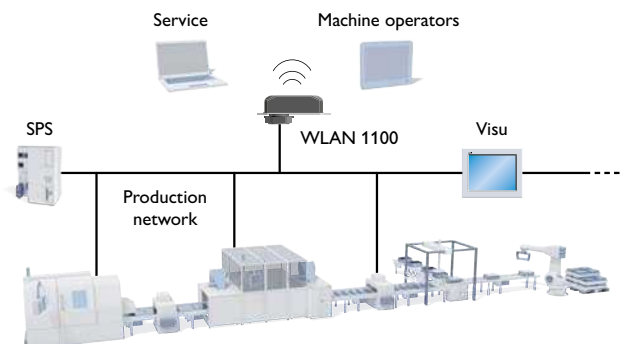


Wireless machine operation and service with wireless LAN

Wireless Ethernet

Mobile routers for worldwide network access

Mobile phone routers support high-performance remote connections to industrial Ethernet networks. This makes it possible to transmit sensitive data securely over networks from machines and systems. The integrated firewall and VPN (Virtual Private Network) support protect against unauthorized access.

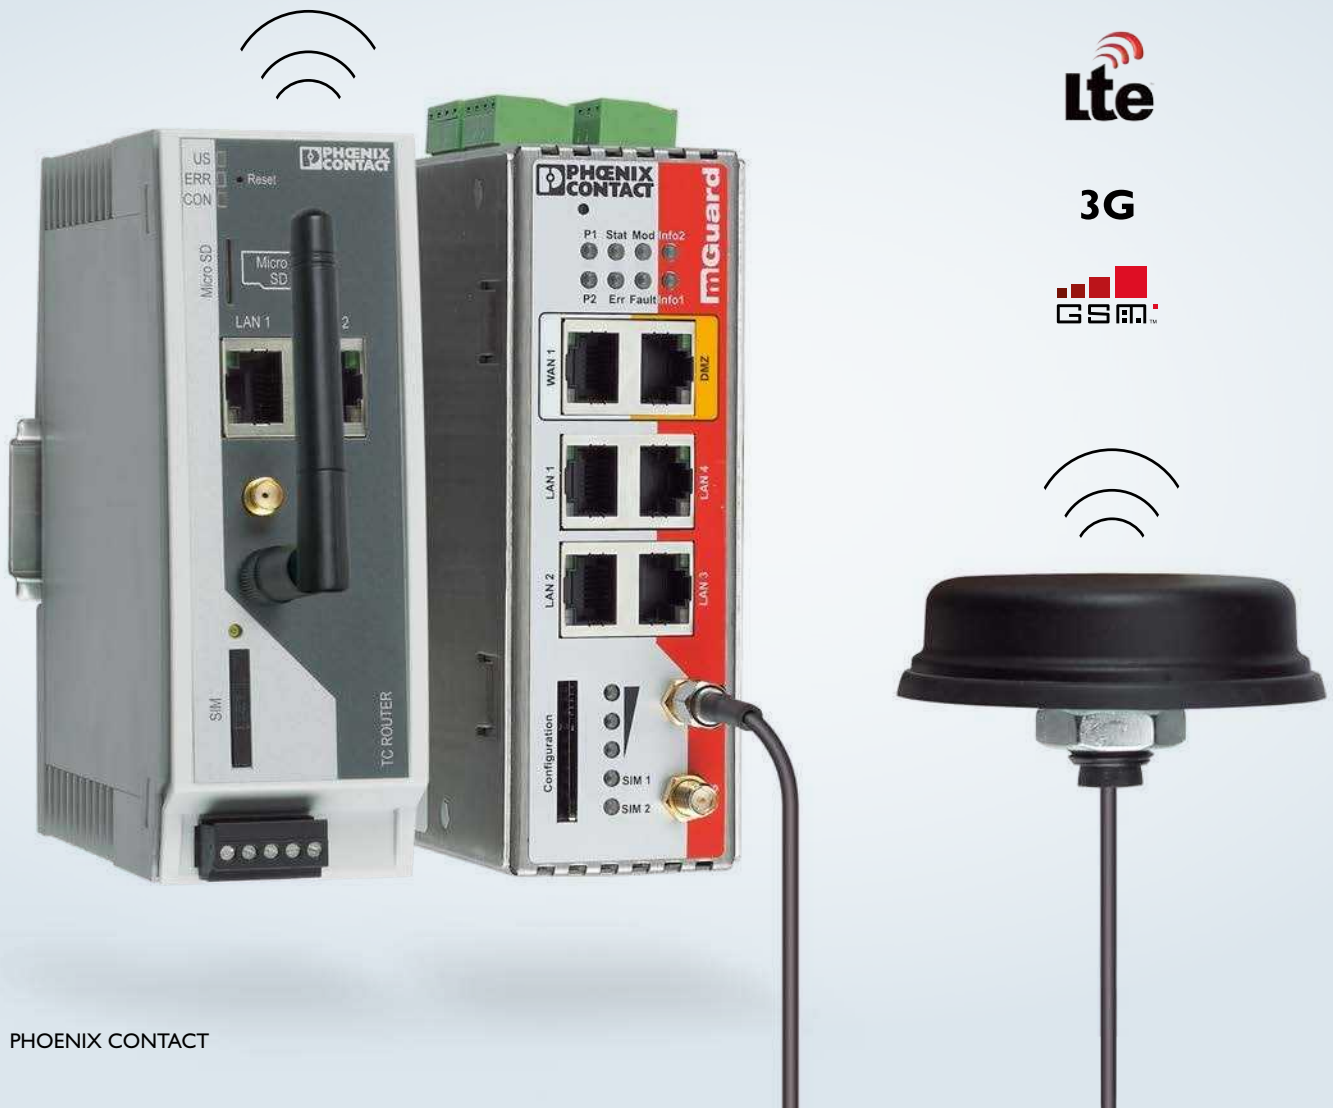

Product overview mobile phone routers



UMTS/HSPA mobile phone router

TC ROUTER 3002T-3G Order No. [2702529](#)
TC ROUTER 2002T-3G Order No. [2702531](#)

- Worldwide data links to applications with medium requirements for the bandwidth
- Alerts via SMS and e-mail
- Temperature range: -40°C ... +70°C
- Firewall for secure communication
- Support for IPsec and OpenVPN (TC Router 3002T)



4G LTE mobile router

TC ROUTER 3002T-4G Order No. [2702528](#)
TC ROUTER 2002T-4G Order No. [2792530](#)
TC ROUTER 3002T-4G VZW Order No. [2702532](#)
TC ROUTER 3002T-4G ATT Order No. [2702533](#)

- Worldwide high-speed data links and alarm generation via 4G mobile phone networks
- Fallback to UMTS/HSPA and GPRS/EDGE
- Support for IPsec and OpenVPN (TC Router 3002T)




Security mobile phone router

TC MGUARD RS4000 3G VPN Order No. [2903440](#)
TC MGUARD RS2000 3G VPN Order No. [2903441](#)
TC MGUARD RS4000 4G VPN Order No. [2903586](#)
TC MGUARD RS2000 4G VPN Order No. [2903588](#)

- Integrated four-port switch
- Two SIM card slots for provider fallback
- Up to ten IPsec VPN tunnels
- GPS for precise time synchronization

Data links

- Worldwide Internet data link via mobile phone networks at up to 150 Mbps
- Flexible use in small machines to larger system networks
- Secure VPN communication

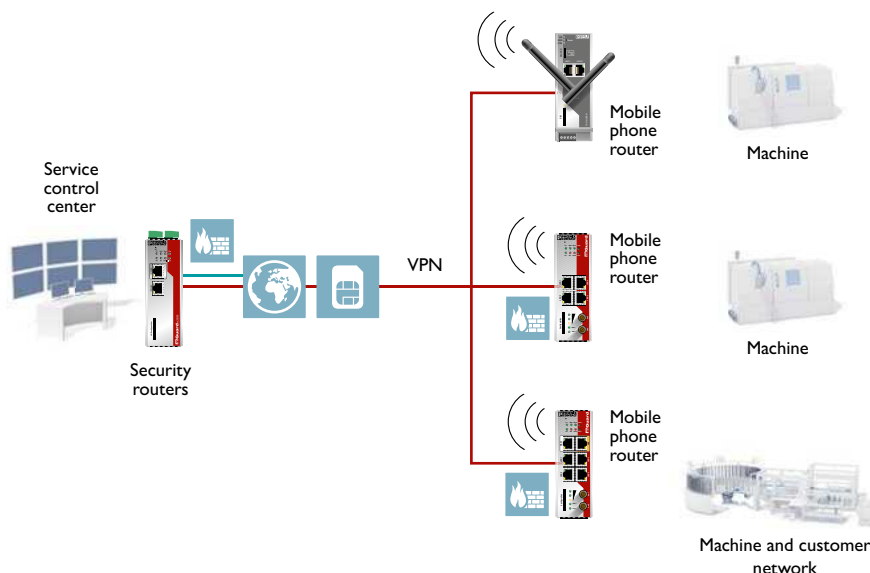

VPN communication via the mobile phone network

Remote maintenance via the Cloud

The mGuard Secure Cloud securely connects service personnel and remote maintenance locations via the Internet in the framework of an encrypted VPN complete solution. Service personnel connect quickly and securely to machines, industrial PCs, and controllers via a simple web interface. In addition, secure remote maintenance can be performed at any location and any time without requiring specialist IT knowledge.



In dialog with customers and partners worldwide

Phoenix Contact is a globally present, Germany-based market leader. Our group is synonym for future-oriented components, systems, and solutions in the fields of electrical engineering, electronics, and automation. A global network across more than 100 countries, and 15,000 employees ensure a close proximity to our customers, which we believe is particularly important.

The wide variety of our innovative products makes it easy for our customers to find future-oriented solutions for different applications and industries. We especially focus on the fields of energy, infrastructure, process and factory automation.



You will find our complete product range at:
phoenixcontact.com



Melbourne

PO Box 3201
 Mentone East Vic 3194
 Unit 12/2 Sibthorpe St
 Braeside Vic 3195
 Ph: (03) 9587 1233
 Fax: (03) 9587 1591

Geelong

Unit 2, 32-44
 Tarkin Court, Bell Park
 Victoria, 3215
 Australia
 Ph: 03 8677 7651

Albury

PO Box 3067
 Albury NSW 2640
 444 Wilson Street
 Albury NSW 2640
 Ph: (02) 6023 1819
 Fax: (02) 6023 1820

Adelaide

22 Marlow Road
 Keswick SA 5035
 Ph: (08) 9587 1233
 Fax: (08) 9587 1591

Gippsland

1/29-31 Eastern Road
 Traralgon VIC 3844
 Ph: (03) 5176 0227
 Fax: (03) 5176 0627

Tasmania

6 Ferguson Drive
 Quciba
 Devonport TAS 7310
 Ph: (03) 6423 4875
 Fax: (03) 6423 4874

Australia-wide, with offices in Melbourne, Geelong, Gippsland, Albury, Tasmania & Adelaide